


ITEM	PART NAME
1	FLEXSPLINE
2	CIRCULAR SPLINE
3	WAVE GENERATOR

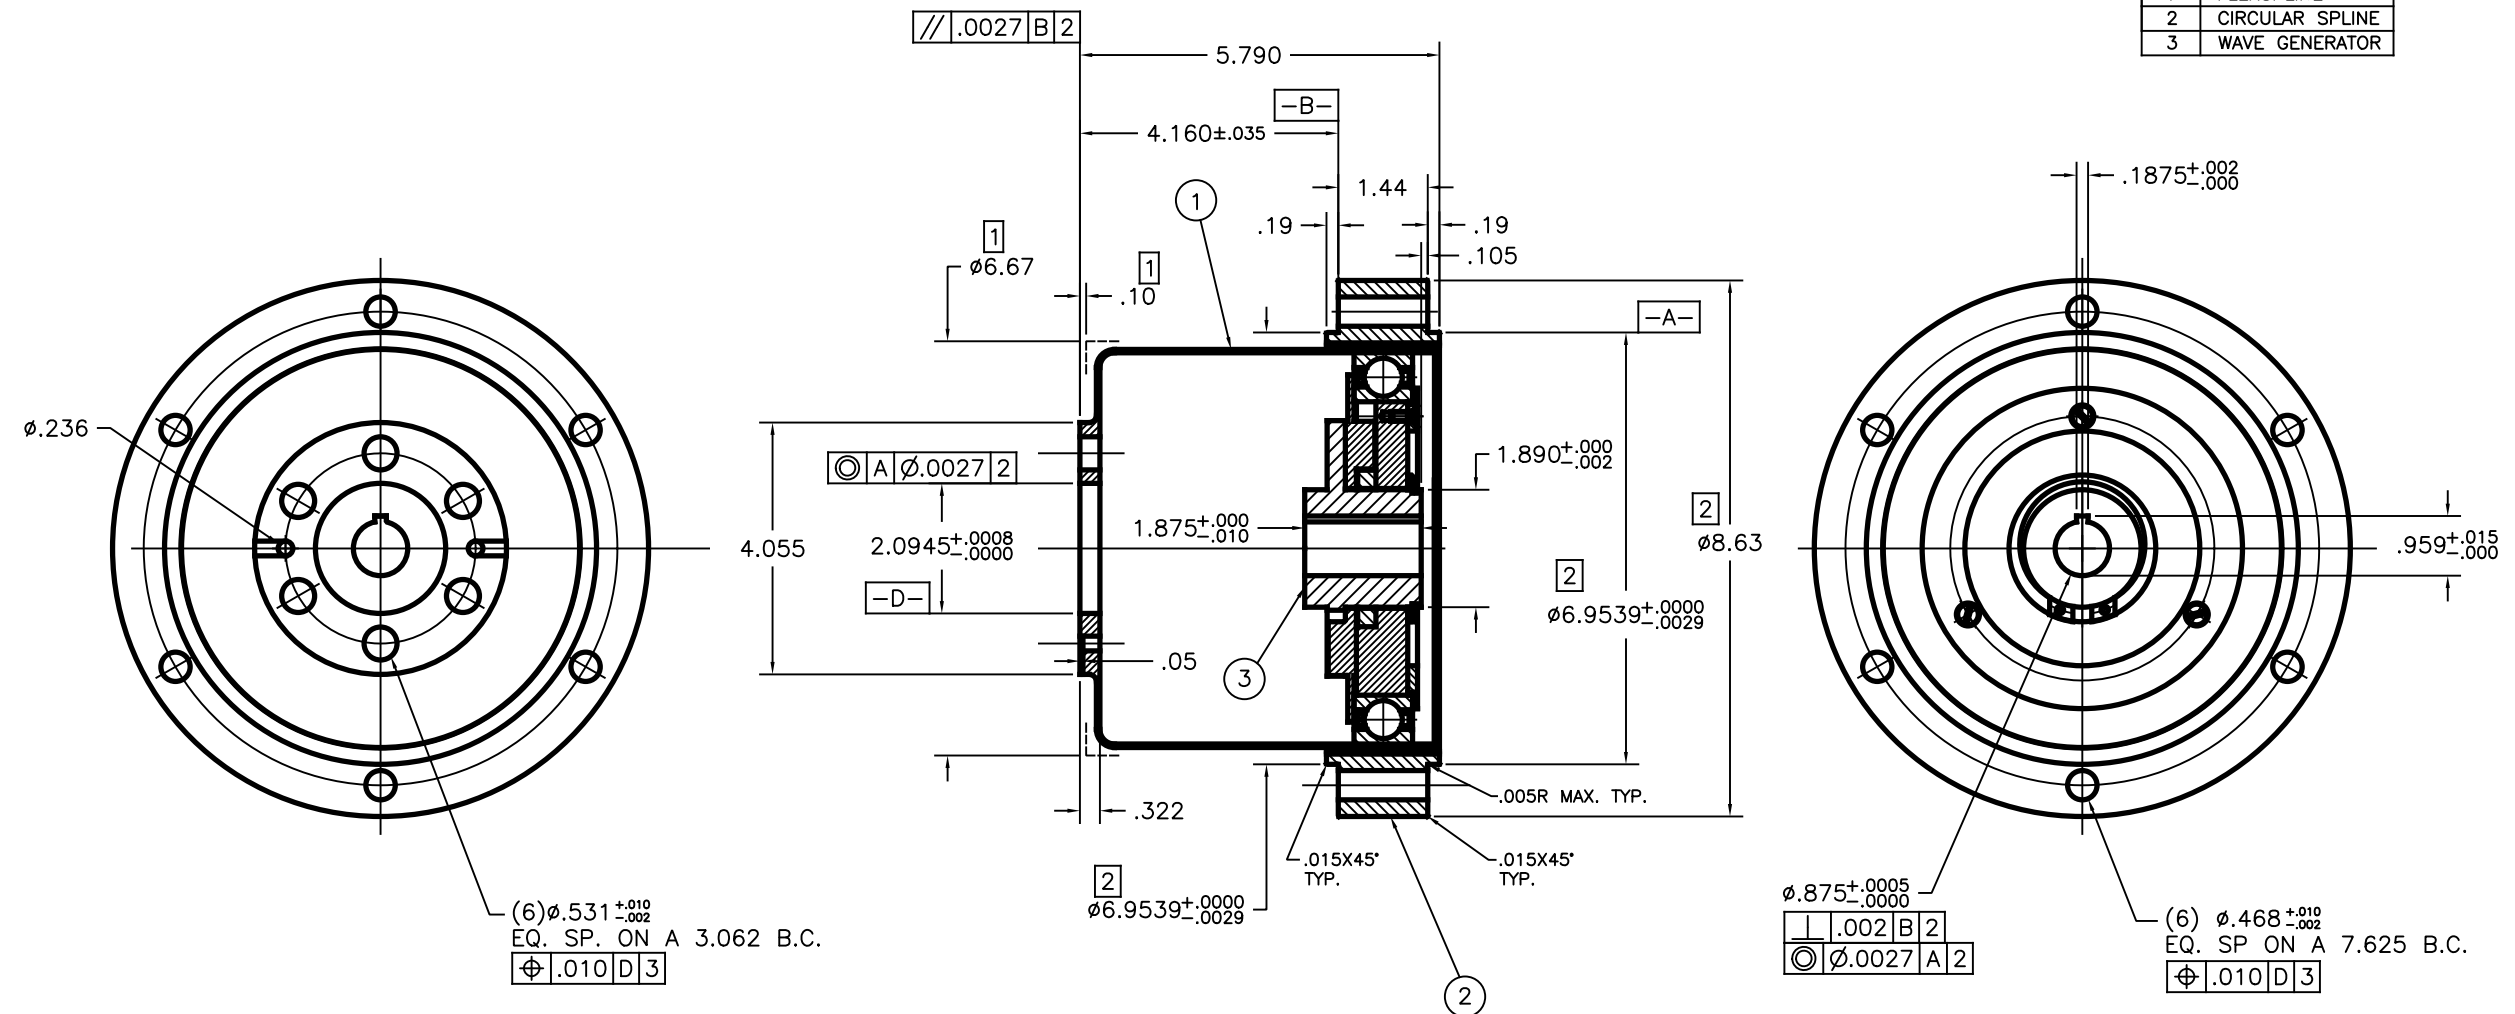

(6)  $\phi .531^{+.010}_{-.002}$   
EQ. SP. ON A 3.062 B.C.  
 $\oplus .010 | D | 3$

$\phi .875^{+.0005}_{-.0000}$   
 $\oplus .010 | D | 3$   
(6)  $\phi .468^{+.010}_{-.002}$   
EQ. SP. ON A 7.625 B.C.  
 $\oplus .010 | D | 3$

- 1 DIMENSIONS SPECIFY MINIMUM CLEARANCE TO MATING PARTS.
- 2 MAINTAIN INTERFACE AND ALIGNMENT UNDER ALL LOAD CONDITIONS.
- 3 USE QUALITY ALLOY SCREWS AND TORQUE TO MANUFACTURERS RECOMMENDED SPECIFICATIONS. USE THREAD LOCKING COMPOUND TO PREVENT LOOSENING.

SYM	DATE	CHANGE	CHNG	APPR
REVISIONS				

UNLESS OTHERWISE SPECIFIED			DRAWN BY: W.Y.	DATE: 09/20/09	<b>CONIC SYSTEMS, INC.</b> <small>HARMONIC GEARING COMPONENTS &amp; GEARBOXES</small> 11 REBEL LANE, PORT JERVIS, NY 12771
DO NOT SCALE DRAWING * BREAK ALL SHARP EDGES *			CHECK BY: M. O'GRADY	DATE: 09/21/09	
DIMENSIONS	TOL.	MM	INCHES	APPROVED BY:	DATE:
	.X	±	±0.30		
MM	.XX	±	±0.10	MATERIAL:	REPLACES:
	.XXX	±	±0.05		
INCHES	FRACTIONAL		±1/64	FINISH:	ASM/PART:
	ANGULAR		±1/2°		
FINISH	$\sqrt{\text{V}}$	THIRD ANGLE PROJECTION			SIZE: DWG: HDC-8M-XXX-E1